



 **GERMAN
ENGINEERED**

Novoferm Sectional Garage Doors



Intelligent Door Solutions



www.novoferm.co.uk

Our Story

Novoferm are proud to be a part of the Sanwa Holding Corporation, founded in 1986 and today, considered to be a major global player in the access systems industry.

Sanwa conduct business in 25 countries and regions worldwide with a strong presence in Japan, North America, and Europe.

At Novoferm, we are building a team and giving them the support to achieve our ambitions. We will continue building on the improvements and investments that have already begun to improve lead-time reliability and quality for all our clients.

Our vision is to lead through organic business improvement, investment, digital enablement, and tuck-in acquisitions.



Contents

We'll find the right solution for you and see that it is tailored to your exact requirements. Whether you're building a new garage or renovating an existing one, you'll find that our incredible selection of doors are always the right choice.



Introduction & Benefits	4-5
Insulated Sectional Door Designs	6-9
ISO45 EVO Specifications	10-11
Insulated Wicket Doors	12-13
Matching Insulated Side Doors	14-15
Insulated Duoport® Side Hinged Doors	16-17
Colours	18
Glazing	19
Automation	20-21
Operators	22-23
Accessories	24-25
Warranty and Maintenance	26
Terms and Conditions	27





“ A house is made of walls and beams; a home is built with love and dreams ”

SECTIONAL GARAGE DOORS

Come home to Novoferm

Introducing the **Novoferm Insulated Sectional Garage Door Range**.

Our sectional garage doors bear the Novoferm seal of quality. All our garage doors and operators comply with ISO 9001 and the safety requirements of European garage door standard EN 13241.

The architecture of our doors is what sets us apart from our competitors, from protecting against intruders to keeping properties warm and dry and the diverse range of customisable options available.

Discover the benefits of a Novoferm Sectional Door

✓ Automation/Operators

The complete range of automatic doors listed in this brochure can be operated remotely with one of our tamper-proof hand transmitters. Alternatively, you can choose from one of our handy remote switches.

Our range of powerful operators come loaded with features such as lighting control and built-in security protection. Plus, our operators can work in tandem with our smartphone app for maximum convenience.

✓ Security

Our Sectional garage doors come with a fully automated option, so there is no lock to pick or force. Rolling code technology in the control system prevents “code grabbing”. Anti-thief features give further protection against unauthorised entry and an integral courtesy light illuminates the garage interior.

Plus, our doors come with other security features, from a built-in emergency sensor to a self-locking motor.

✓ Colours/RAL Colours

Our doors are available in an array of eye-catching colours, with options to suit any preference and the period and aesthetics of your home.



✓ Wood Effect/Finishes


Our Sectional doors boast 4 stunning wood effects and finishes, allowing you to enjoy the best of both worlds.

✓ Insulation

Premium insulation keeps your property warm and dry in the winter and cool in the summer. It can also help with dampening external noises.



Insulated Sectional Doors



SCAN TO SEE MORE DETAILS

Novoferm's sectional garage doors are made up of separate sections that vertically lift and then run on tracks back into the garage. This style of opening allows you more space in front of the garage, as they do not swing out which means you can use every inch of available space in front of your garage.

Our insulated sectional doors comprise the highest quality materials including a built-in layer of insulation. This keeps your garage warm and dry in the winter or cool in the summer, helping to control your energy bills. It also helps reduce noise levels.

You can choose from two different insulation options depending on your requirements - ISO20 (20mm) and the ISO45 (45mm).

Features and Benefits

- Tension Spring
- Interference-Protected Deflection Pulley
- New Cable Mount
- Multiple Extension Spring Assemblies
- NovoPort® - Unique and Flexible
- Anti-Pinch Inside and Out
- Interference Protection
- Double Skinned Insulation
- Lip seals on Frame
- Stainless Steel Frame Base

Heat
insulation
values
up to:

ISO20 doors
 $K = 1.0W/m^2K$

ISO45 doors
 $K = 0.46W/m^2k$



WARRANTY
COVER



MADE TO
MEASURE



REMOTE
OPTION



SECURITY
LOCKING



INSULATED SECTIONAL DOOR

Styles



WARRANTY COVER



MADE TO MEASURE



REMOTE OPTION



SECURITY LOCKING



SPACE SAVING



Flush | ISO20/45



Horizontal Rib | ISO20/45



Microline | ISO20/45



Large Rib | ISO20/45



Panelled Glazed | ISO20/45




Georgian Panelled | ISO20/45

- Space-Saving
- Great Insulating Performance
- Built-in Safety Features
- Market-Leading Security



NEW: Exceptionally good heat insulation thanks to the thermal break

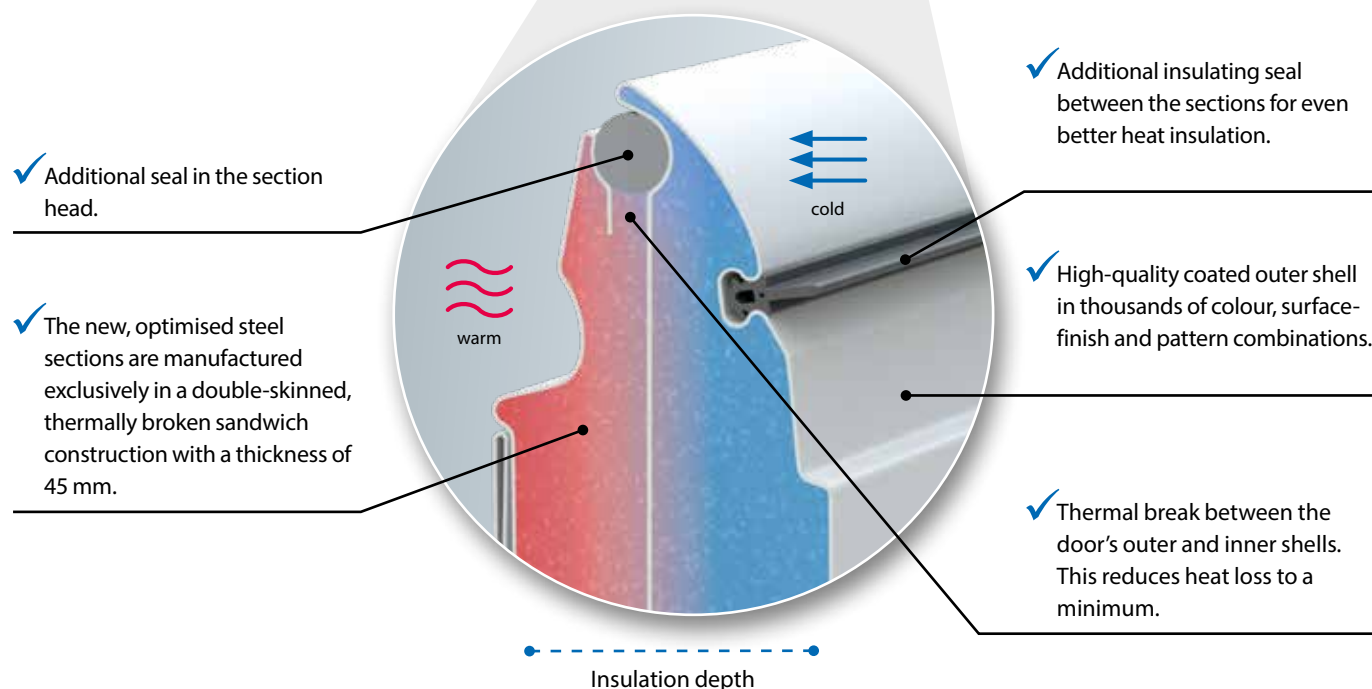

*With respect to door solutions with comparable section thicknesses. Performance dependent on door pattern and size



INTERNAL VALUES What's behind the Evo 45

- 1 **New: harmonious look for the inside door surface**
A highlight of the Evolution premium door is the harmonious appearance of the inside of the door. The surface here is in Traffic white (similar to RAL 9016). In addition to the profiles or section end caps in RAL 9016, the outer colour of the door is also no longer visible on the inside as the door rolls up or down.
- 2 **New: thermal barrier**
The exclusive thermally broken sections, with PUR rigid polyurethane foam core and additional seals between the sections, deliver even greater heat insulation.

- 3 **New: variable floor profile**
The new floor profile on the bottom edge of the garage door compensates for minor floor unevenness of up to 10 mm, and long holes ensure high flexibility during installation.
- 4 **Great flexibility: optional spring technology**
The Evolution premium door can be optionally equipped with multiple tension spring assemblies or torsion springs. The vertical tension springs require a smaller installation depth (in combination with a low header) and open up new possibilities when space is limited. On larger sizes, the door is equipped with torsion springs either front or back.

Why choose a Wicket Door?

Wicket doors are a great alternative to side doors in cases where there's insufficient space to the side of the main door.

Wicket doors are standard doors that are integrated into the main door leaf.

The purpose is to allow quick and easy access without having to open and close the main door.

This also helps you manage security and privacy better as the main door will remain closed when not in use.



SCAN TO SEE MORE DETAILS

Insulated Wicket Doors



Horizontal Rib | ISO45



Large Rib | ISO45



Horizontal Rib Glazed | ISO45

Wicket doors are available for all ISO45 sectional garage doors up to a width of 5m. They offer a practical passage width of 80cm and provide perfect heat insulation due to the double-skinned insulation used.




Flush | ISO45



Panelled Glazed | ISO45



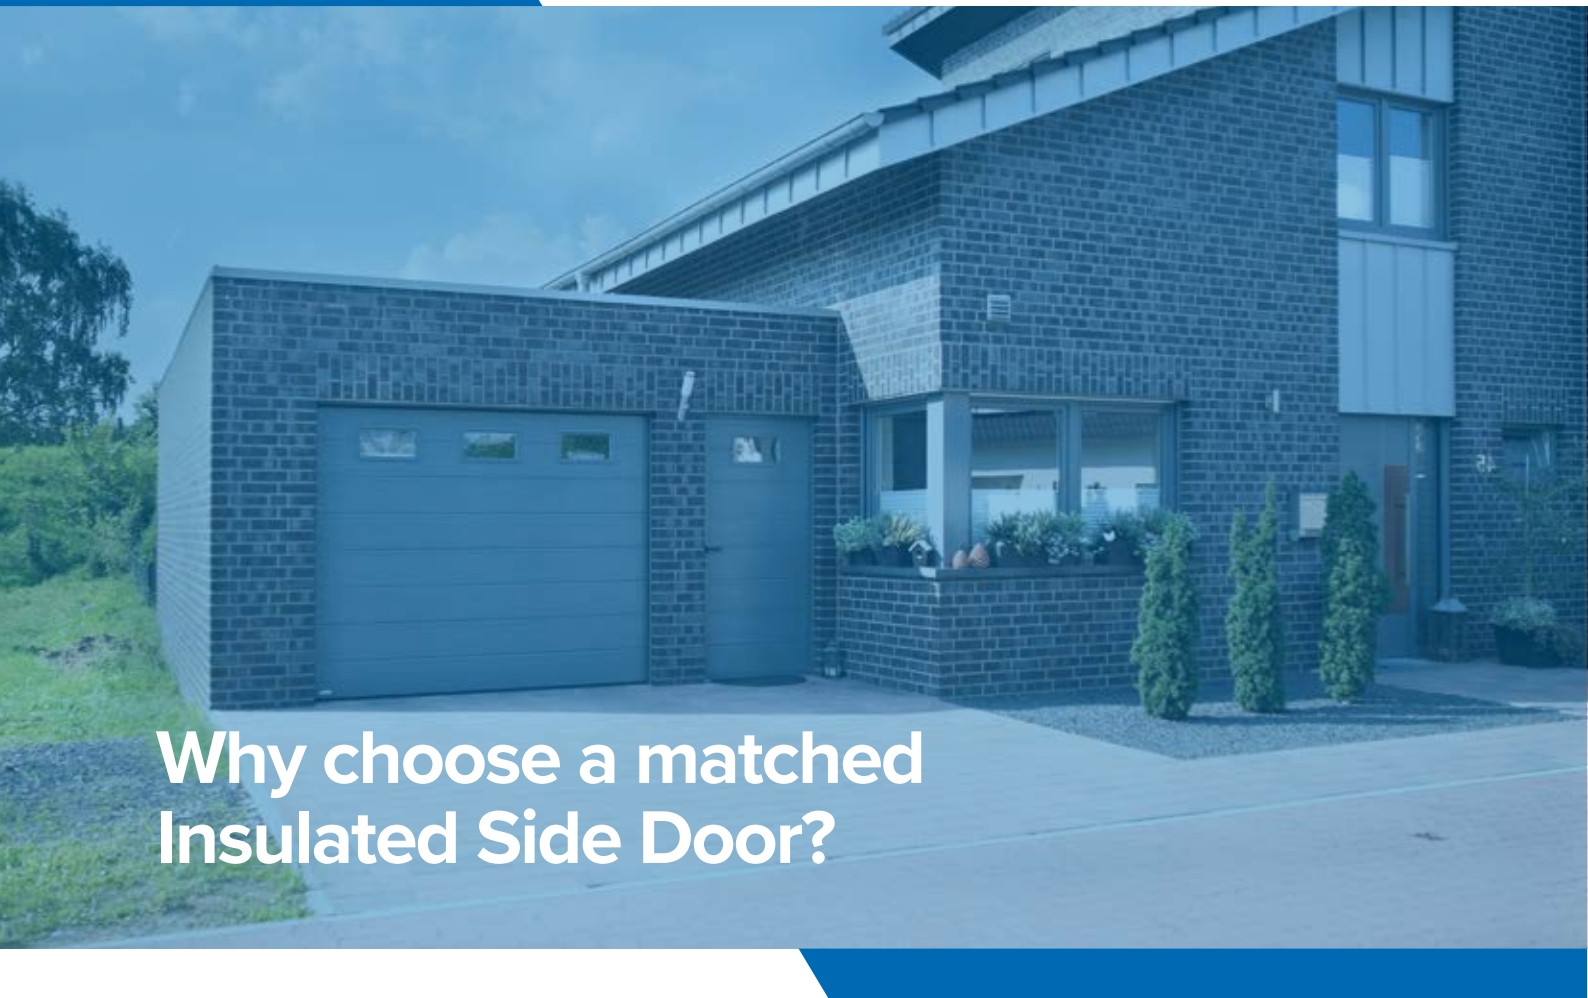

Why choose a matched
Insulated Side Door?



Reliable Operation

All door leaf frames are made of galvanised steel, while robust hinges ensure long-term, dimensionally accurate opening and closing.

Built-in Insulation

Add the built-in insulation, which provides both a thermal and acoustic barrier, helping to control your energy bills, reduce noise and possibly your carbon footprint.

Insulated Sectional Side Doors



Horizontal Rib



Large Rib



Flush



Panelled Glazed



Microline



SCAN TO SEE MORE DETAILS



Would you like a matching side door for your insulated sectional doors?

With our insulated sectional side doors, you can be in and out in no time through a matching side door. There's no need to raise and lower the whole garage door just to get to your bike, tools, or lawnmower.

We have matching side doors for all sectional garage doors for when you need to nip in and out of your garage.

All side doors are built strong and durable and come fully insulated with a handle set and security lock as standard. Weatherseals help keep out the elements. ISO20 doors feature a door leaf frame and corner door frame made from steel. ISO45 doors feature a door leaf frame and block door frame made from steel. Robust hinges provide long-term, dimensionally accurate opening and closing. The hinges are also threeway adjustable, allowing for precise adjustments during assembly.



Why choose an Insulated Duoport® Side Hinged Door?

The Duoport® Side Hinged Door is the perfect choice for homeowners who value tradition, versatility, and comfort.



SCAN TO SEE MORE DETAILS

Insulated DuoPort® Side Hinged Doors



Insulated DuoPort® side hinged doors consist of two doors that open "barn door" style rather than vertically. These doors are available as a 50/50 split with both door leaves of equal size. There's also the choice to have the doors open inwards or outwards.

Our Insulated DuoPort® leaf doors offer you the possibility to use your garage as a utility room, for leisure time or hobbies.

You can choose whether to open both doors or just the active door.

Discover the benefits of a Duoport® Side Hinged Door

Novoferm range of DuoPort insulated side hinged doors provide you with high insulation values, these doors will also offer you the possibility to use your garage as a utility room for hobbies and leisure time.

The use of high-quality and durable materials, top-quality processing and a wide variety of additional fittings give your garage a classic appearance in keeping with the style of your house and your personal taste.



Horizontal Rib



Large Rib



Panelled



Flush

Ideal for private garages

DIMENSIONS minimum DuoPort® door size 1530 w x 1940 h (Over Frame Sizes)

Outstanding Heat Insulation

INSULATED heat insulation is ensured by the 45mm rigid PUR foam core.

Flexible Installation

PRACTICAL block door frame allows flexible installation.

Configurations

FLEXIBLE door leaf either opening outwards or inwards with active and inactive leaves positioned either to the left or right.

Added Security

SECURE 3-point locking with hinge lock is available as an optional extra.

Wide range of Colours

CHOICE OF colours, patterns and surfaces as well as additional fixings such as glazing.



WARRANTY COVER



MADE TO MEASURE



SECURITY LOCKING

INSULATED SECTIONAL DOORS

Colours

Insulated doors can work with your lifestyle in so many different ways.




Smooth
depending on pattern




RAL colours available on request

Super-Color colours

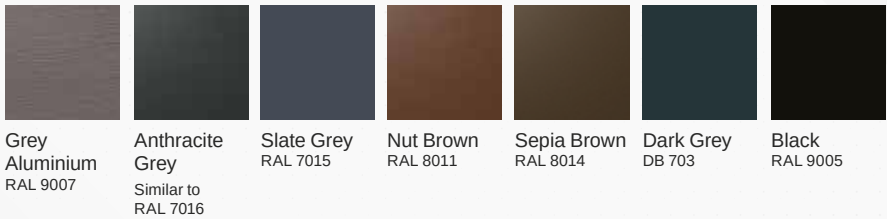


Rustic Wood effects

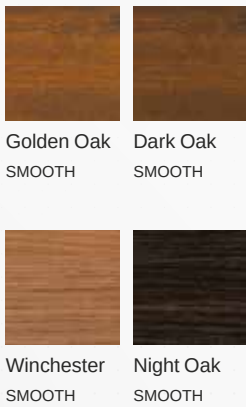

Our insulated sectional garage doors are available with 4 different weather-resistant, top-coated film laminates in authentic, rustic wood effects with a smooth surface. In addition to the large rib pattern, you can now also order all the wood effects in the flush and some in the panel pattern.

Benefit from our Structural Surfaces

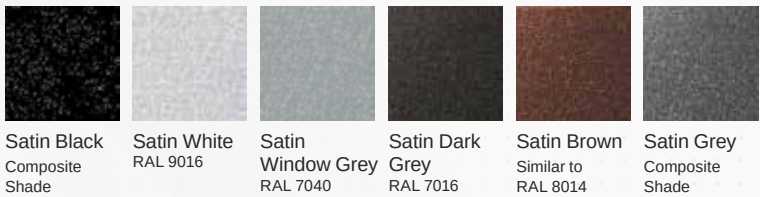

Our insulated sectional garage doors are now available in 6 more decorative, top-coated satin matt structural surfaces with reduced dirt retention and exceptional weather resistance.

Microline Pattern (Flush)



Exclusively for the flush pattern for ISO45 sectional garage doors, our popular industrial door profiled finish Microline (Flush) is available in Satin grey and Satin white. This is a modern, profiled wave structure with a striking and expressive light and shade effect.

INSULATED SECTIONAL DOORS

Glazing

All Novoferm glazing panels are manufactured out of weather-resistant acrylic glass or impact-resistant polycarbonate.



Glazing Options

Our attractive glazing options not only make a feature of your garage, but also let the light in, especially appealing if you use your garage as a storage room or workshop.

Novoferm glazing panels stand out due to their high transparency and have excellent heat insulating properties - just like our insulated sectional garage doors.

Horizontal Light Strip



Porthole Stainless Steel Window Surround



Square Aluminium Window Surround



Plain Clear | Crystal



Cross Clear | Crystal



Rhombus Clear | Crystal



Square Leaded Clear | Crystal



Diamond Leaded Clear | Crystal

Sunrise Patterns

The 'sunrise' pattern can be modified to suit different width garages up to 5.5metres wide.



Sectional doors are bespoke and made to order

All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Garage doors supplied may vary in colour from the brochure representation.

Automate your Garage Door



SCAN TO SEE MORE DETAILS



Novoferm garage door operators used with sectional doors can be controlled via the Novoferm Mobility APP "SmartGarage". You can download it free of charge from the App Store or Google Play.

All our garage door operators and additional hardware (e.g., light strips) are fitted with energy-saving LED lamps and many of our operators only consume 0.5 W in standby mode. All Novoferm operators are manufactured to the highest industry standards and come with a five-year guarantee.

Hand transmitters are protected by AES 128-bit encryption and multi-part rolling codes.

The approved 3-button technology helps with simple and fast adjustment of the operator functions. We also offer a variety of special attractive control pads which are constructed from UV-stable materials.

Advantages

- ✓ Intuitive Adjustment
- ✓ Smartphone-Enabled Door Control
- ✓ Remote Lighting
- ✓ Control More Than One Garage



Smart Garage App

Our new operator generation is presented with more push and pull force and also trendy and style formative. The new Novoferm garage door operators feature modern technology with contemporary energy efficiency on the highest level combined with optimised design, modern LED technology, stability and highest performance.

NEW: Most of our new garage door operators used with sectional doors can be controlled via the Novoferm Mobility APP "SmartGarage", you can download it free of charge from the APP store or GOOGLE Play.

With one "swipe" across the touch screen you can open and close the garage door, control the lighting, ventilation function and you can read out the operator parameters.

To use the mobility app you need the mobility package, which contains the Novoferm Gateway and Novoferm WLAN module.

You can buy it from your Novoferm distributor. When you use the Novoferm Mobility APP, or when it is not possible to see the door, you need to save the garage door with a light barrier, additionally to the normal force control, which is standard.

The Mobility App SmartGarage is not suitable for up and over doors.



Operators

NOVOMATIC CEILING MOUNTED OPERATORS

Exclusive convenience

If you are renovating your garage, you don't just want it to look better, but to also make it more convenient to use. With the integrated automated system you'll never have to get out in the rain again, to open your garage door by hand.

The garage door and operator are perfectly matched and certified by independent institutes in accordance with the latest safety guidelines, giving you the comfort of maximum security and top quality, with a 5 year guarantee on mechanics and motor included!

The new Novomatic 443 and Novomatic Speed 573 S garage door operators update the Novomatic range of products. They impress with bright and energy-saving LED lighting, more smart connection options and innovative design. The new Novomatic operators are suitable for sectional and up-and-over garage doors made by Novoferm. Installed under the ceiling to save space, these operators look good in any garage with their modern casing. Very important: naturally, the operators are smart home compatible – a convenience factor that cannot be absent from any modern home!



SCAN TO SEE MORE DETAILS

Novomatic 573S

Suitable for single and double garages with integrated fast running function

New modern design and high-quality technology come together in the Novomatic 573S to a modern high-tech and top-class operator system.

Well-engineered technical details, for example up to 50 % faster door opening due to the integrated high-speed function and the integrated energy saving LED-lighting (1.6 Watt), offering comfort and energy efficiency on the highest level.



- Energy saving with 0.5 Watt power supply in stand-by mode.
- Power supply: 230 V / 50 Hz.
- Pull and push force 800 N.
- Running Speed: 24 cm/s.
- Maximum door area: 18 m2.
- App Control available.
- CE marked.

Novomatic 443

Ideal entry level solution for single garages

Advanced technology belongs in a modern casing. Novoferm 443 is trendy and stylish. It is the professional system for operating sectional and up-and-over garage doors.

This garage door operator is a particularly good match for Novoferm garage doors, but is also perfect for retrofitting other garage door makes.



- Energy saving with 0.5 Watt power supply in stand-by mode.
- Power supply: 230 V / 50 Hz.
- Pull and push force: 600 N.
- Running speed: 18 cm/s.
- Maximum door area: 10 m2.
- App Control available.
- CE marked.

NovoPort® Speed

novoferm

Intelligent Door Solutions



Stand-by
<0.5
Watt

Extra
Energy
Savings

SIDE MOUNTED OPERATOR

When replacing a garage door, homeowners, customers and businesses alike seek both visual and technical improvements. The NovoPort® Speed system offers an unparalleled solution, combining a state of the art operator with the market leading ISO 45 EVO sectional door range. Breaking from tradition, the NovoPort® Speed operator is the only side mounted operator on the market. Instead of being fixed to the ceiling, it is integrated into the side door track. This innovative approach keeps the ceiling clear and eliminates common installation challenges, making it ideal for in-between fits and low ceilings.

The NovoPort® Speed system by Novoferm sets a new benchmark for garage door innovation, offering a perfect blend of convenience, efficiency and advanced technology. Elevate your garage door offerings with the only side mounted sectional door operator that combines seamless integration, superior performance and smart home connectivity, all backed by Novoferm's trusted quality and expertise.

NovoPort® Speed

- ✓ Integrated high speed function for door opening that is up to 50 % faster (up to 29cm/s)
- ✓ Modern and 20 % flatter casing with continuous LED Strip for energy saving and bright illumination
- ✓ Integrated, indirect lighting with LED (6 Watt) switched on automatically when opening
- ✓ Automatic closing after a set time can be programmed (opto sensor required)
- ✓ The door can be operated by app or voice command
- ✓ Simple integration in existing smart home systems



WARRANTY
COVER

Accessories

You'll need the right accessories to go with the hardware of your choice



SCAN TO SEE MORE DETAILS

Hand transmitters



Mini-Novotron 522 Design hand transmitter
2-channel, 433 MHz, KeeLoq rolling code



Mini-Novotron 524 Design hand transmitter
4-channel, 433 MHz, KeeLoq rolling code



Mini-Novotron 522 hand transmitter
2-channel, 433 MHz, KeeLoq rolling code



Mini-Novotron 524 hand transmitter
4-channel, 433 MHz, KeeLoq rolling code

Upgrade your Hardware

OPTIONAL EXTRA Handles available in Black and White finishes.




WARRANTY COVER


Wireless Switches



Signal 111 remote wall switch
2-channel, 433 MHz, KeeLoq rolling code for controlling 2 operators or 1 operator and 1 outside lighting in UV-resistant material



Signal 218 remote coded key pad
10 codes, 433 MHz, KeeLoq rolling code with stainless steel cover, backlit in UV-resistant material



Signal 112 wall switch
Start key, holiday switch, continuous light (On/ Off), 24 V connection to the operator in UV-resistant material



Coded key pad signal 213
3 signals, metal key pad, 230 V connection



Extra 625 one-way opto sensor
24 V DC, IP 54
Range: 8 m
Suitable for:
All operator models



Extra 626 one-way opto sensor
20-28 V, IP 50, 2 wire
Range: 8 m
Suitable for:
Novomatic 423/ 563 S



Extra 628 reflection light opto sensor
24-240 V AC, 12-240 V DC, IP 54
Range: 5 m
Can only be used as a pulse generator



Battery Back-up (Accu)

For Novomatic 423

Accu is a lightweight and easy to carry battery back-up unit that will temporarily keep your garage door in full operation during a power cut.

Warranty and Maintenance

Our Promise

During the warranty period, we undertake to rectify any defects to the Novoferm product, which can be proven to be attributed to a material or manufacturing defect.

We promise, at our discretion, to either exchange the defective merchandise or repair it.

Replacement parts remain our property.

What is Covered

- 10 Years – Safe and Reliable Operation (for use up to 5 open/close cycles per day)
- 10 years – Structural Integrity of Door Panels
- 10 years – Panel Corrosion
- 10 years – On Immovable Frame Parts
- 5 years – Finish (all colours)
- 2 years – Movable and Mechanical parts (including, but not limited to, wheels and brackets on the door panel, lock mechanism, lock barrel)

Door Finish

Our sectional doors, insulated sectional side doors and insulated side hinged doors are fully finished with a sprayed colour finish or with a foil backed laminated finish. Weathering and sun exposure can cause the finish to fade. We guarantee the finish on doors for five years on laminated finishes and that any fading will be minimal and uniform, providing the door is maintained in accordance with the care and maintenance advice.

Corrosion

Doors situated in 'high corrosive' areas such as within three miles of the sea, or a large body of saltwater, are not covered for rust or corrosion of steel parts. Cleaning of the doors is especially important in these locations.

Warranty Requirements

The warranty only covers manufacturing faults to the purchased garage door or garage door operator. Damage to these is not cover. You will be required to show a fully completed warranty service passport (service to be conducted by a qualified

engineer annually), together with a receipt of purchase, which substantiates your right to claim under warranty. The finish on doors is exempt from the service requirements. In the event of a claim, please contact the company that supplied/ installed the doors. They will raise the warranty on your behalf.

During the claims process, a site inspection may be required. For this, we will send an independent assessor. Should this inspection indicate the fault was not caused by a manufacturing defect, you will be liable for the cost of a non-warranty call out. The cost of the call out will be advised prior to the arranged visit.

Novoferm will not accept consequential costs for installation or de-installation, the inspection of parts, transport, and postage costs.

Care and Maintenance

Your door should be kept clean, with any stains removed as soon as possible. You should also ensure the door does not come into contact with any caustic or acidic substance which could damage the door surface or structure. Your door should be cleaned thoroughly approximately every 2-3 months (in coastal areas or areas close to large bodies of saltwater, this should be done weekly) using warm water and a soft cloth or sponge. Allow the door to dry naturally. Never use detergent, abrasive, caustic, or solvent-based cleaners.

Lubricate all springs, latches, wheel spindles, and pivot points using light lubricating oil (e.g., 3-in-1). Take care not to allow oil to drip onto the face of the door. Ensure track runners are clean and free from obstacles at all times. Check moving parts for signs of wear. If any wear is detected, arrange for these to be replaced as soon as possible (failure to replace these parts can invalidate your warranty). Do not paint springs or any moving parts

For automated doors, do not operate the door when not within visual range.

What is not Covered?

- Improper installation, negligent care, and maintenance - doors that have not been maintained or had annual maintenance/ servicing
- Improper initial and subsequent operation

- Negligent or wanton destruction
- External influences, such as fire, water, salts, alkaline solutions, acids, and any abnormal environmental influences, sunlight
- Mechanical damage, through improper transport and fitting, or through falling or hitting objects
- Repair by non-qualified persons
- Using non-Novoferm parts without the written approval of the manufacturer
- Removal of the product number, or making it unidentifiable
- Application of additional, non-approved weights or infills
- Failure to remove the protective film or packaging provided with the product, where applicable
- Failures caused by extreme or abnormal weather conditions

Visual Standards Check

Visual standards checks must be carried out prior to a warranty submission. This check should be carried out in natural daylight, not direct sunlight, standing at a distance of 3m from the door to view the overall appearance. Doors are acceptable if the following are not readily visible on the face of the door:

- Marks or distortion associated with the manufacturing process
- Minor indentations, marks, or scuffs on the surface
- Paint or stain blemishes

Full full details on our warranty and maintance, please visit www.novoferm.co.uk/installation-warranty-and-maintenance-details/

Terms and Conditions

Warranty

In the unlikely event of a warranty claim becoming necessary please contact the dealer or distributor who supplied the door.

To enable your claim to be processed without delay you should provide the following information:

- Your name, address and contact telephone number
- The original invoice and date of purchase
- A description of the door, the door type and the product number
- A description of the reason for the claim

Your dealer will then supply details of your claim, together with a copy of the warranty card supplied with the door and proof of purchase, to the warranty department at Novoferm UK.

An assessment of the claim will be made. This may mean Novoferm will need to come and inspect your door at your premises.

In the event that there is no legitimate claim under the terms of the warranty you will be liable for the costs of this visit. It is essential that you take note of the care and maintenance instructions provided with your door and you follow these instructions throughout the lifetime of your door.

The warranty does not cover:

- Improper installation
- Normal wear and tear
- Priming and other surface protection treatments
- Negligent or wanton destruction
- Incorrect or too late applied surface protection treatments
- Repair by a non-qualified installer
- Use of non-Novoferm parts without the approval of Novoferm
- Damage or removal of the product number or making it unidentifiable
- Improper operation
- External influences, such as fire, salts, water, sun, alkaline solutions, abnormal environmental influences
- Mechanical damage caused by improper transport or installation

All dark colours which are exposed to direct sunlight should be avoided. Dark coloured doors may undergo expansion due to heat absorption. Such instances are not covered by the guarantee, however normal performance will revert when the door has cooled down if the heat absorption has affected the door's performance.

All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Garage doors supplied may vary in colour from the brochure representation.

Prices

All orders are accepted on the understanding that the goods will be subject to the prices ruling at the time of delivery, unless other terms are specifically agreed. All prices are in £ sterling and exclude VAT.

A 25% handling charge applies to all unwanted items on standard stock items only. Items must be returned unopened and in an unused condition.

All returns are subject to acceptance by Novoferm UK Limited.

Specification

Due to the progressive outlook of the Novoferm Group we reserve the right to alter specifications to design and manufacture without notification. All specifications and details are correct at the time of publication, errors and omissions excepted.

All Doors

Colour match Pairs of doors should be ordered together to obtain the best colour match, bearing in mind the limitations of the materials used in the construction. Timber garage doors cannot be ordered as matching sets.

Size variations As the size of a door changes in height and/or width, the panel frequency and profile can change, therefore doors of the same style but of different sizes can be significantly different in appearance.

Clearances All doors require operating clearances, i.e. the gap between the door panel and frame opening, these are inbuilt during manufacture and should not be reduced by means of infills, or draught-proofing.

Deflection When in the open position, all doors will display a level of vertical deflection or 'sag' across the width of the panel. Individual manufacturers' specifications should be consulted for exact tolerances.

Right to Cancel

Any bespoke product which is made to measure/customised, is exempt of any cancellation rights.



Your Novoferm Stockist



Intelligent Door Solutions



Call Us Now +44 (1582) 563777

Opening times
8.30am - 5.00pm
Monday to Friday

Novoferm UK
Unit 5 - 9 North Luton Industrial Estate
Sedgwick Road
Luton
LU4 9DT
E: customerservice@novoferm.co.uk
www.novoferm.co.uk